


CWT COMPACT

TECHNICAL DATA

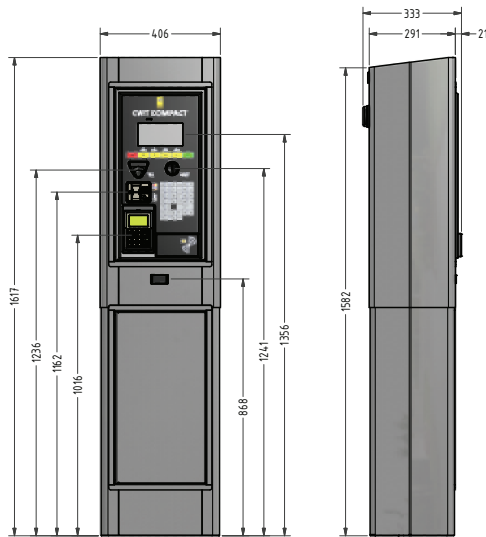

All measurements in mm.

Cabinet and pedestal

Dimensions (HxWxD) 1 616.5 x 406 x 306 mm *
(63.64" x 16" x 12").

Weight 75-85 kg (165-187 pounds).

Construction LDX stainless steel and aluminium.

Compliance Tested according to EN 12414, EN14450, MIL810, CE, FCC, ADA, DDA, PMR, Electrical safety and PCI level 1. Designed and produced according to ISO 9001 and ISO 14001.

Electrical data

Mains operation 230 V / 115 V AC

Battery operation 12 V DC **

Solar operation 12 V, 10.5 W ***

Environmental conditions

Operating temp. -35 °C to 60 °C
(-31 °F to 140 °F).

Relative humidity Up to 97%.

Heating High efficiency heaters with thermostat. Only available with mains power.

Operation

Function buttons Touch technology:
- 4 software controlled buttons below the display.
- Separate Accept and Reject buttons.
- Alphanumeric keyboard with up to 48 buttons.

Front overlay Standard or custom design.

CPU System and display

Display Graphical, monochrome, 6.6".
Supports various alphabets.

Appl. & data memory SD card, up to 4 GB.

Near field communication

NFC Contactless card or RFID tag for Electronic lock access and Cale Online Permit Account service.

Card payment

Magstripe Insertion reader for track2 with various online processing services.

EMV Insertion reader with optional PIN-pad mounted in a recessed privacy shield.

Contactless Mifare DesFire smart card support. Also used for Electronic lock access and Cale Online Permit Account service.

*) DDA (Disability Discrimination Act) compability available.

**) Operation time on battery depends on battery size, environmental conditions and ticket purchase volumes.

***) Operation time on solar depends battery size, environmental conditions and the geographical location.



CALE

Coin system

Coin slot protection	Mechanical coin slot shutter with inductive loop.
Coin verifier	Industry standard for up to 16 coins/tokens, three switch controlled, reprogrammable, tolerance ranges.
Escrow volume	0.35 litres, 12.3 fl oz (UK) or 1.8 fl oz (US).
Cash vault	4 mm (0.16") sheet metal with side drilling protection.
Cash vault door	6 mm (0.24") hardened steel, 4-way and 6 points, drilling-protected locking latches.
Cash vault locks	Abloy Exec.
Coin box	4.6 litres, 161.9 fl oz (UK) or 155.5 fl oz (US) with presence sensor. SW controlled overflow protection. Closed cash collection system supported.
Audit ticket	Supported.

Printer

Printer type	Thermoelectric.
Graphics	Supported.
Orientation	Landscape and portrait.
Paper supply	57 mm (2.24"), from roll.
Black mark	Supported.
Ticket length	70–150 mm (2.75–5.9").
No. of tickets	Up to 4 500 per roll.
Paper thickness	55–110 g/m ² .
Paper loading	Automatic.
Take ticket sensor	Standard.

Communication

GPRS	Supported.
LAN	Supported.
Type of data	Transactions, blacklists, tariffs, parameters, SW, OS, Firmware, statistics, alarms, etc.

Miscellaneous

Mounting frame	The CWT Compact is compatible with base anchors supplied by Cale and various other terminal suppliers.
Electronic locks	Patented Cale technology with central administration and both electronic and mechanical opening mechanisms.
Buzzer	Supported.
Audio	Multi language audio support with pre-recorded messages or sounds for press of a button, panels, popups etc.
Vibration detector	Supported.

Central administration

Software	Cale WebOffice 2 central management system. Hosted Software as a Service (SaaS) Solution.
----------	---

Some of the features described may be optional. Due to continual product development, specifications are subject to change without notice.



CALE AUSTRALIA PTY. LTD.
Phone (08) 9275 2634
austsales@caleaccess.com.au
www.caleaccess.com.au
Unit 3, 4 Bookham Street
Morley WA 6062